

Applying Dalsun's Acrylic Emulsions

1. Prepare surface thoroughly and apply Putty/Primer as required.
2. Add about 30-40% of clean water to 1 Ltr. of Emulsion.
3. Apply 2-3 coats with 4-6 hours time interval between coats.
4. Suitable for application with brush/roller/spray.

Applying Dalsun's Premium Synthetic Enamel


1. After proper surface preparation, use appropriate Primer .
2. Mix 1 Ltr. of Dalsun's Enamel with 10-15% M.T.O.
3. Apply 2nd coat after over night drying of first coat.



Re cycle



Go Green



Value of Money



Lead free



Weather Sheen
Premium Emulsion



Weathertuff
Emulsion



Weather - X
Emulsion



Wallshine Premium
Interior Emulsion



Nanocote
Interior Emulsion



Thunder Premium
Synthetic Enamel



DALSUN PAINTS®

A Professionaly Managed Company

In Association with NBIC PAINTS OF WEST AFRICA



In Association with NBIC PAINTS OF WEST AFRICA

Manufactured By:

DALSUN PAINTS PVT. LTD.

P.O. Box No. 39 Pin 144 001

Customer Care: info@dalsunpaints.com

Visit Us at www.dalsunpaints.com

COLOUR CATALOGUE

Dalsun's Premium Synthetic Enamel




Also available in Black & Brilliant White



Dalsun's Acrylic Emulsion Shades



Mettalic Shades

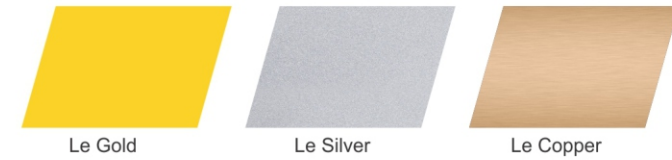

Textures from Dalsun

